



www.bullsbattery.com

BPDG DEEP CYCLE GEL BATTERY



Voltage covers: 6V, 8V, 12V
Capacity: From 24Ah to 260Ah
Designed floating service life: 12-15 years @ 20°C/68°F
Warranty: 2-3 years

Features



- Superior deep cycle design with high percentage tin
- Thick plates and high power density
- Active paste material, and a slightly stronger acid
- Adopts silicon dioxide electrolyte in gelled state to avoid acid leakage
- Nano gel electrolyte eliminate the acid stratification and prolong cycle life

Application

- Telecommunication Systems
- Solar & Wind Power Systems
- UPS Systems
- Golf/Utility Vehicles
- Backup Power
- Sweeper/Scrubbers/Floor machines



Chart

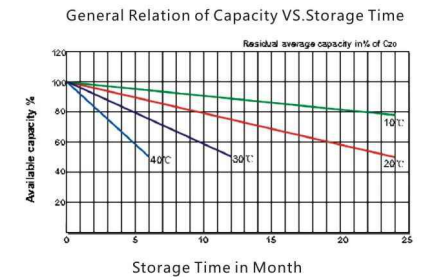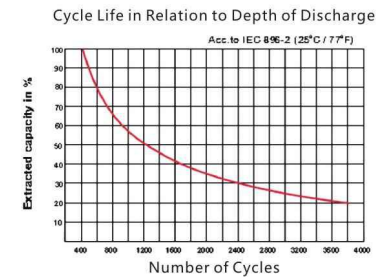

Specification

BATTERY TYPE	Nominal Voltage (V)	20Hr Capacity (Ah)	Length (mm)	External Dimension			Weight Approx (± 3%) (kgs)	Terminal Type
				Width (mm)	Height (mm)	Total Height (mm)		
BPDG6-200	6	200/20HR	306	168	220	222	30.5	T5
BPDG6-210	6	210/20HR	260	180	247	249	30	T5
BPDG6-220	6	220/20HR	306	168	220	222	32.0	T5
BPDG6-225	6	225/20HR	243	187	275	275	31.5	T6
BPDG6-310	6	310/20HR	295	178	346	366	46.0	T7
BPDG6-330	6	330/20HR	295	178	354	360	46.6	T6
BPDG6-380	6	380/20HR	295	178	404	410	55.5	T5/T6
BPDG6-420	6	420/20HR	295	178	404	410	56.8	T5/T6
BPDG8-200	8	200/20HR	260	182	295	301	39.0	T5
BPDG12-24	12	25/20HR	166	175	126	126	8.3	T1
BPDG12-26	12	25/20HR	165	126	174	179	8.4	T1
BPDG12-35	12	35/20HR	196	130	155	167	10.5	T3
BPDG12-40	12	40/20HR	198	166	174	174	14.5	T2
BPDG12-55	12	55/20HR	229	138	208	212	16.0	T3
BPDG12-70	12	70/20HR	350	167	178	178	23.5	T3
BPDG12-75	12	75/20HR	260	169	208	227	25.0	T3
BPDG12-85	12	85/20HR	260	169	208	227	26.1	T3
BPDG12-90	12	90/20HR	307	169	211	216	28.5	T3
BPDG12-100	12	100/20HR	307	169	211	216	30.5	T3
BPDG12-110	12	110/20HR	331	174	214	220	33.5	T4
BPDG12-120	12	120/20HR	407	173	210	233	39.5	T5
BPDG12-135	12	135/20HR	344	172	280	285	41.5	T5
BPDG12-150	12	150/20HR	484	171	241	241	46.0	T4
BPDG12-180	12	180/20HR	532	206	216	222	56.0	T4
BPDG12-200	12	200/20HR	532	206	216	222	58.8	T5
BPDG12-220	12	220/20HR	522	240	219	225	64.0	T5
BPDG12-240	12	240/20HR	520	268	220	226	71.0	T5
BPDG12-260	12	260/20HR	520	268	220	226	77.0	T5